

## DanPumps model S-WN5 - 50 Hz

### Product Applications

The DanPumps S-WN5 pump is especially designed for wastewater applications and offers high hydraulic efficiencies from 75-200 kW. It is suitable for unscreened wastewater from sewage plants and industries.

### Design

The characteristics of our wastewater pumps are high quality, long lifetime and user friendly design. The DanPumps S-WN5 pump can be delivered as horizontal or vertical installation and with either a channel or a B-tween impeller.

### Materials

Pump Housing, base elbow, cartridge seal	Grey cast iron	GJL-250(GG25)	A-48 Class35
Impeller (cast iron) adapter	Ductile cast iron	GJS-400-15 (GGG-40)	A536 GR 65-45
Option: Stainless steel impeller	Stainless cast steel	W.Nr.1.4401	AISI 316
Shaft	Stainless steel	W.Nr.1.4057	AISI 431
Seal sleeve, screws	Stainless steel	W.Nr.1.4301	AISI 304
O-rings	Nitrile	NBR	
Oil	Mobil DTE 24	Premium Hydraulic	
Mechanical seal	Media side: SIC / SIC	Cooling side: SIC / Carbon	
Motor	Standard	IP55 IE3	




### Operation standards

- Connections up to DN400
- Flow Rate up to 3500 m<sup>3</sup>/h
- Overheating and moisture protection
- Channel, vortex and B-tween impellers in the same volute
- Double mechanical cartridge seal
- Standard motor IP55 IE3
- Long lifetime due to accurate balancing
- Customized solutions and a modular system
- Easy maintenance
- Adjustable wear ring



Performance Curve - WN5 Range - 50 Hz

S-WN5

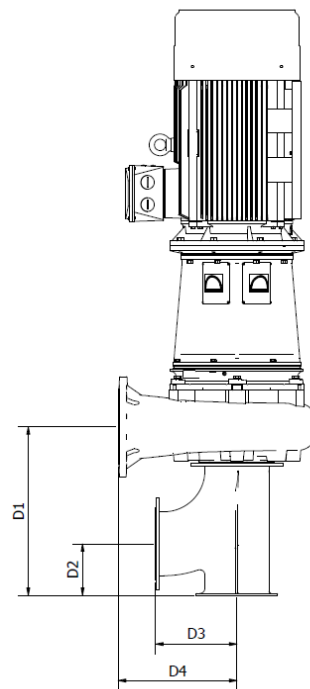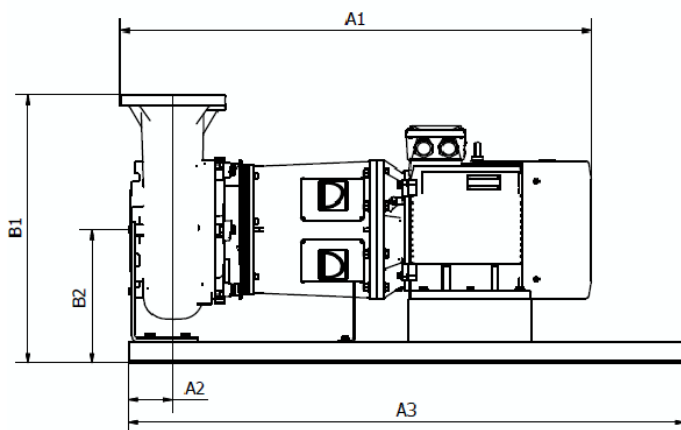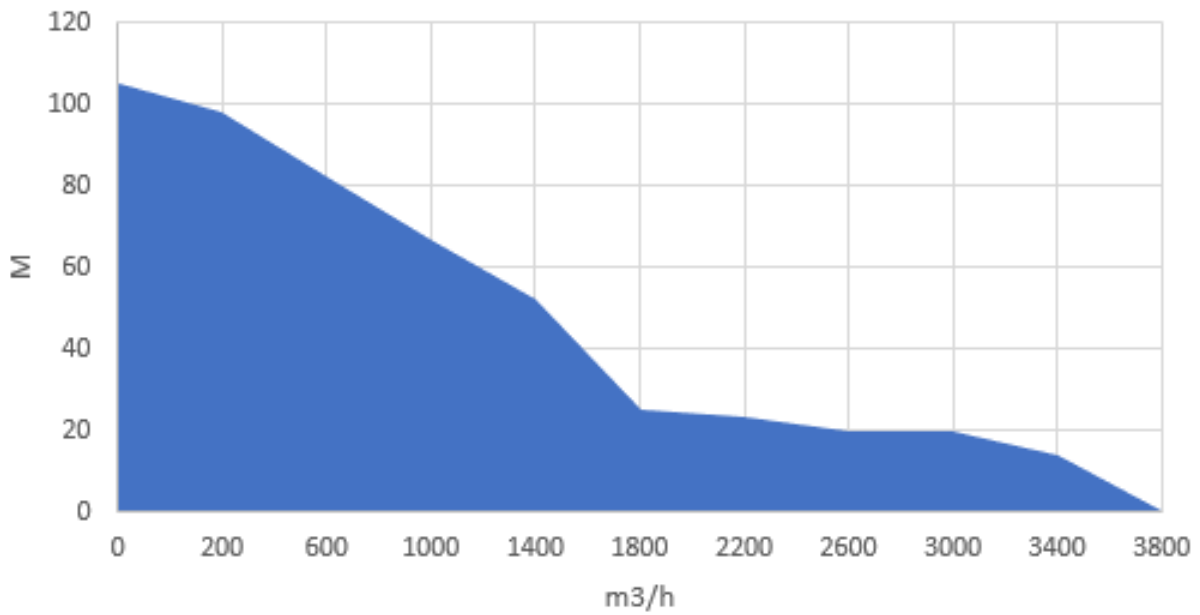

Dimensions are in mm	A1	A2	A3	B1	B2	D1	D2	D3	D4
S-WN5-200-2L-M315	2215	166	2200	1166	640	600	190	260	526
S-WN5-300-2L-M315	2304	190	2200	1224	640	832	255	400	584
S-WN5-400-2L-M315	2375	266	2200	1440	640	1070	320	500	800

Copyright © -2017 DanPumps A/S - DanPumps cannot be held responsible for possible errors in catalogues, brochures or other printed materials. DanPumps A/S reserves the right at any time to change the specifications without notice.