

Submersible Drainage Pump J 12

Specification

Electric submersible pump.
Maximum submergence: 20 m. Protection class IP 68.
Max temperature of pumped medium at max power input and continuous duty 40 °C.
Max medium density 1100 kg/m³. pH of the pumped medium 5-8.
Strainer hole: 8.5 mm. Max number of starts 30/hour.

J 12 W/WKS* Medium head, single-phase

J 12 D/DKS* Medium head, 3-phase

* option: built in float switch excl. 500 V

Electric motor

Single-phase induction motor with built-in start and run capacitor, 50 Hz.

Service factor 1.1. Class F insulation.
Voltage: 230 V. Motor rating P₂: 0.9 kW. Speed: 2770 rpm
η: 70.3 (50 %), 71.5 (75 %), 66.8 (100 % load)

Voltage: 110 V. Motor rating P₂: 1.4 kW. Speed: 2825 rpm
η: 77.63 (50 %), 78.06 (75 %), 72.75 (100 % load)

Voltage, V	110	230
Nominal current, A	12.7	5.9

3-phase squirrel-cage induction motor, 50 Hz.

Service factor 1.1. Class F insulation.
Motor rating P₂: 0.9 kW. Speed: 2770 rpm
D.O.L. start with built-in contactor.
η: 78.0 (50 %), 76.0 (75 %), 70.5 (100 % load)

Voltage, V	230	400	500
Nominal current, A	3.8	2.2	1.8

Power cable

20 m type H07RN8-F:
4 x 1.5 sq.mm. (3-phase)
3 x 1.5 sq.mm. (single-phase)

Motor protection

Built-in thermal switches in the stator winding (140°C, ±5).

Shaft seal

Double mechanical seal in oil bath.
Primary seal: Silicon carbide on silicon carbide.
Secondary seal: Silicon carbide on silicon carbide.

Bearings

Upper bearing: Single-row deep groove ball bearing.
Lower bearing: Single-row deep groove ball bearing.



50Hz

Discharge connections

1 ½", 2" (standard), 2 ½", 3" hose connections.
2", 2 ½", 3" B.S.P. threaded connections.


Weight

D: 18 kg, W: 19 kg (without cable)

Options and accessories

Zinc anodes. Surface protection coating.
Bottom suction adapter. Series connection.
Starter and control units. Floatation ring.
Carry case. Repair kit.
Discharge connection accessories and hose.


Performance curve

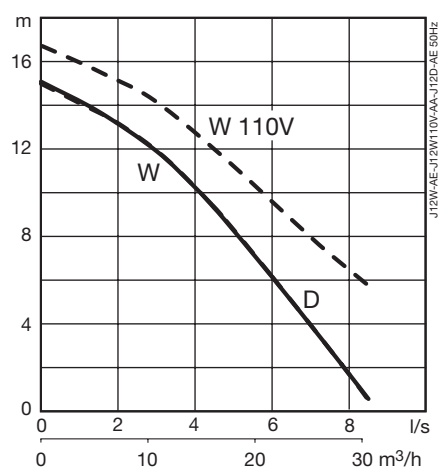

Materials

Description	Material	EN	ASTM
Castings	Aluminium	EN 1706:AC-43100	ASTM A1Si10mg
Casing / Fasteners	Stainless steel	10088:X5CrNi18-10 (1.4301)	AISI 304
Shaft	Stainless steel	10088:X20Cr13 (1.4021)	AISI 420
Impeller	White cast iron	EN-GJN-HV600(XCr23)	ASTM A 532: Alloy III A
Wear parts / O-rings	Nitrile rubber		

Dimensions

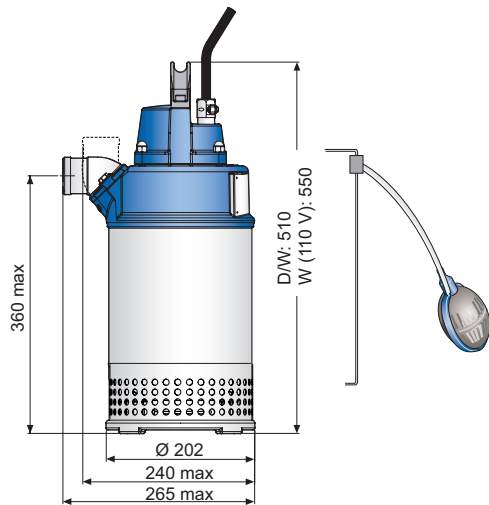

J 12 50Hz en 05.2026, Copyright © Sulzer Ltd 2026

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.